

- suitable for TOP and SUB due to bridged NLT4 plugs
 - robust connectors with metal shells
 - conductor cross-section: 2.5 mm²
 - adapts a 4-way speaker multicore to 2 single speaker signals
 - suitable for d&b
 - Z2292.002 adapter NLT4M to 2x NLT4F
- geeignet für TOP und SUB durch gebrückte NLT4 stecker
 - robuste steckverbinder mit metall gehäuse
 - leiterquerschnitt: 2,5 mm²
 - adaptiert ein 4-fach lautsprecher multicore auf 2 einzelne lautsprecher signale
 - passend für d&b
 - Z2292.002 adapter NLT4M auf 2x NLT4F



technical data

cable
cable typ 2x LY225S (2x 2.5 mm²) speaker cable
cable jacket PVC
cross section 2.5 mm²


connectors
connector 1 1x speakON 4p male / Neutrik
connector 2 2x speakON 4p female / Neutrik

technische daten

kabel
kabeltyp 2x LY225S (2x 2,5 mm²) lautsprecher kabel
kabelmantel PVC
querschnitt 2,5 mm²

steckverbinder
anschluss 1 1x speakON 4p male / Neutrik
connector 2 2x speakON 4p female / Neutrik

SYT4M-T4FB
 Line Array Adapter TOP & SUB

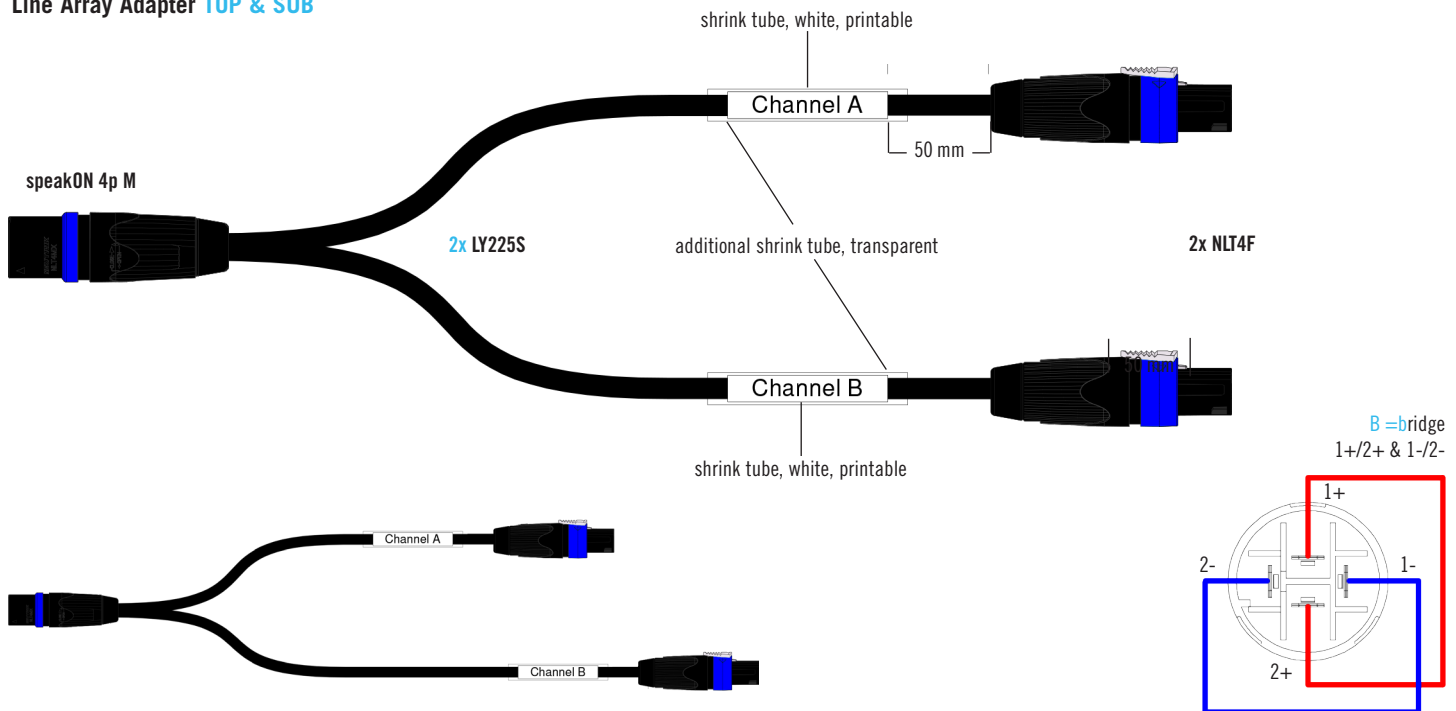

order / variations

bestellung / variationen

order code bestell-nr.	fanout length spleißlänge [mm]	type typ	input input	output output	colour farbe
SYT4M-T4FB-00.6	600	TOP / SUB	1x speakON 4p male	2x speakON 4p female	black / schwarz
SYT4M-T4FB-01.0	1000	TOP / SUB	1x speakON 4p male	2x speakON 4p female	black / schwarz
SYT4M-T4FB-01.5	1500	TOP / SUB	1x speakON 4p male	2x speakON 4p female	black / schwarz
SYT4M-T4FB-Y018	600 / 1200	TOP / SUB	1x speakON 4p male	2x speakON 4p female	black / schwarz